


# METER POLE SERVICE - SINGLE PHASE


## BOTTOM DELIVERY - 120/240 VOLTS - SELF CONTAINED

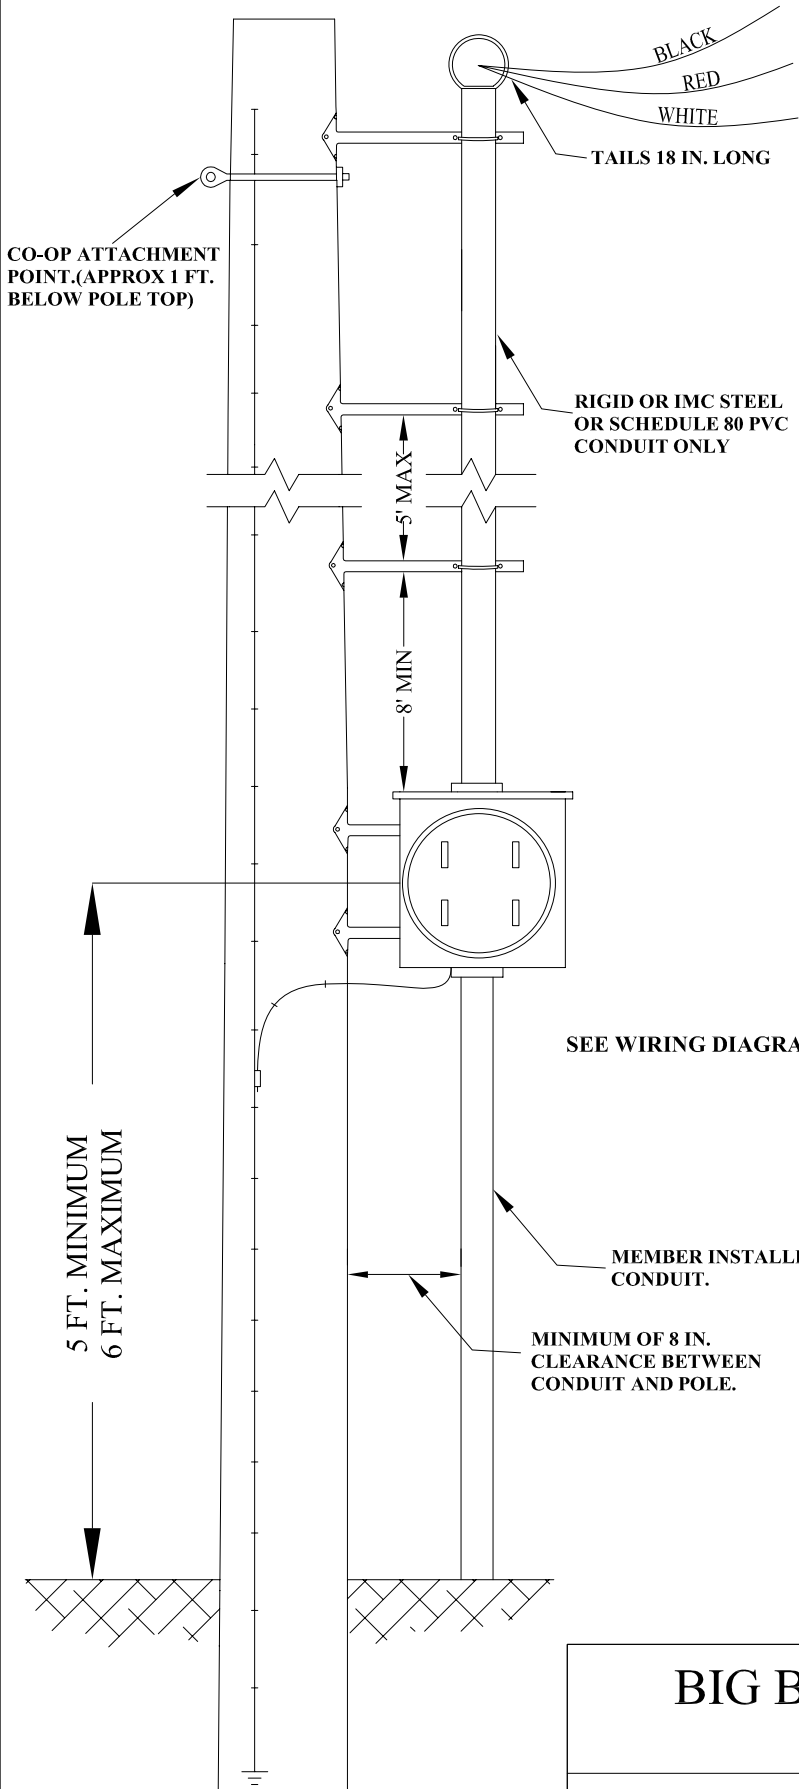

### NOTES:

1. POLE, SERVICE TO POLE, METER, AND GROUND WIRE FURNISHED BY B.B.E.C.
2. MAXIMUM RATING 320 AMPS.
3. ALL CONDUITS AND METERING TO BE MOUNTED ON STAND-OFF BRACKETS A MINIMUM OF 8 IN. FROM POLE.
4. CONDUIT LENGTH AS REQUIRED TO PLACE WEATHER HEAD BETWEEN CO-OP ATTACHMENT POINT AND POLE TOP. TYPICAL LENGTHS:  
 14 FT. FOR 25 FT. POLE  
 18.5 FT. FOR 30 FT. POLE  
 23 FT. FOR 35 FT. POLE
5. CONDUIT SHALL BE RIGID OR IMC STEEL OR SCHEDULE 80 PVC ONLY.
6. DEPENDENT ON YOUR SERVICE INSTALLATION, A MAIN BREAKER MAY BE REQUIRED. CONTACT AN ELECTRICIAN OR STATE L & I PRIOR TO INSTALLING YOUR METERING EQUIPMENT.

### WIRING DIAGRAM

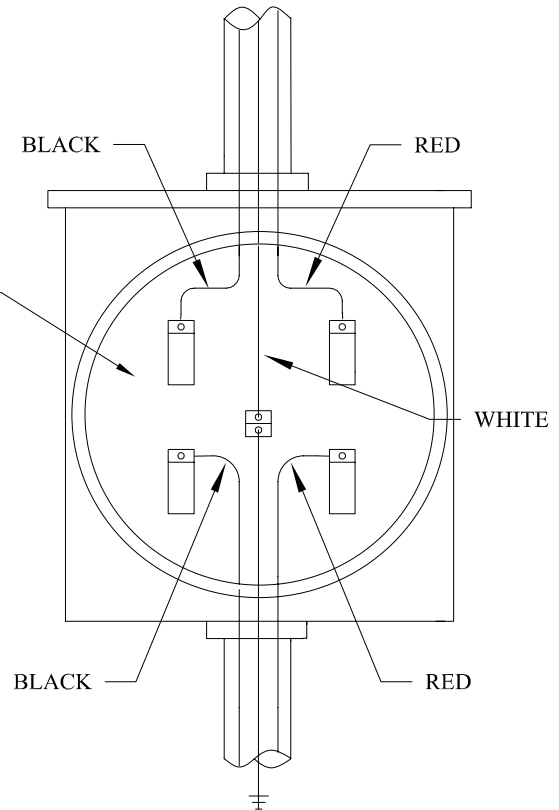

**BIG BEND ELECTRIC COOP, INC.**  
**RITZVILLE, WA**

Drawn By: J.R.L.	Date: 3/24/09
Approved By: C.A.C.	Date: 4/27/09

**DIAGRAM A**